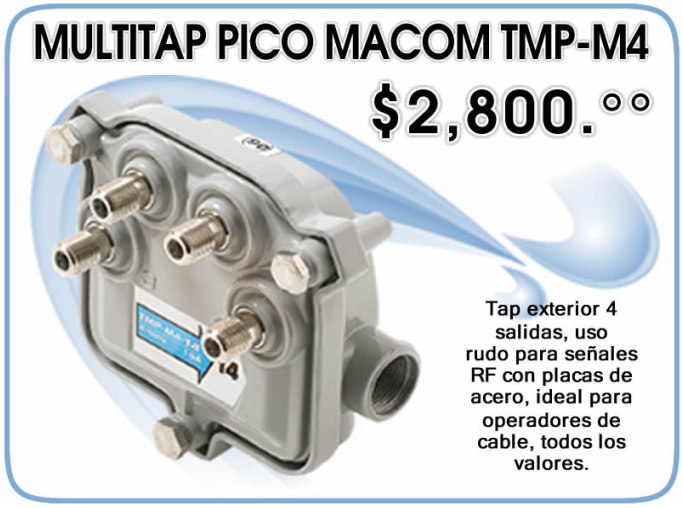


Multitap Pico Digital TMP-M4

Características:

5MHz to 1GHz Bandwidth performance.
• Interchangeable faceplates provide “on-the-fly” redesign for maximum time savings and reduced costs.
• Continuous RF signal and power pass-thru during tap-plate removal ensures uninterrupted system services.
• Bi-directional power rating to 15amps @ 30, 60 and 90Vac provide compatibility with most systems.
• F-ports triple sealed to 15psi and neoprene tap plate seal provide watertight operation in harsh conditions.
• Housing top stainless steel mounting hardware for easy installation.
• Tap output ports employ capacitor coupling for effective DC voltage blocking for improved hum modulation and intermodulation performance.
• Performance tests conducted conforming with SCTE standards IPS TP-201, 202 and 203.

TMP-M4-(values):
4-Port 1GHz Hardline Digital Multitaps
(Values: 8T, 11, 14, 17, 20, 23, 26, 29, 32, 35dB)